


XSE Series High Pressure Solenoid Valve



Technical parameters

- Working medium: High pressure liquid, gas, light oil
- Medium temperature: -5~130°C
- Working pressure: 0~250bar
- Voltage: AC220V/50HZ/DC24V/AC110V/50HZ
- Body material: stainless steel SS304
- Sealing material: PTFE

Internal structure & profile size figure

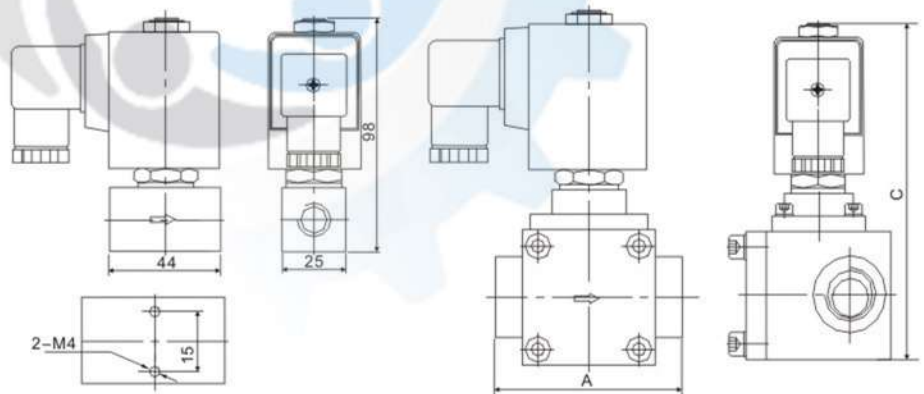

Matches

- With the LED indicator light connector
- With Germany Nass coil

Technology data

Model	Connecting Method	Diameter	Cv value	Length (mm)	Height (mm)	Medium temp.	Working pressure (pressure differential)	Rated voltage
XSE-A-1	G 1/4"	1	0.04	44	100	-5~130°C	0~180 bar	220VAC/50HZ 110VAC/50HZ 40VA DC24 DC12 25W Tolerance: ± 10% Other voltage can be customized
XSE-A-2	G 1/4"	2	0.15	44	100		0~100 bar	
XSE-A-3	G 3/8"	3	0.25	44	100		0~50 bar	
XSE-B-1	G 1/4"	1	0.04	49	98		0~180 bar	
XSE-B-2	G 1/4"	2	0.15	49	98		0~100 bar	
XSE-B-3	G 3/8"	3	0.25	49	98		0~50 bar	
XSE-10	G 3/8"	10	3.5	60	125		6~150 bar	
XSE-15	G 1/2"	15	4.4	70	138		6~150 bar	
XSE-20	G 3/4"	20	7	80	144		6~150 bar	
XSE-25	G 1"	25	11	90	154		6~150 bar	