

XSG series 2/2 way high pressure solenoid valve



XSG-15




XSG-20



XSG-25

Internal structure & profile size figure

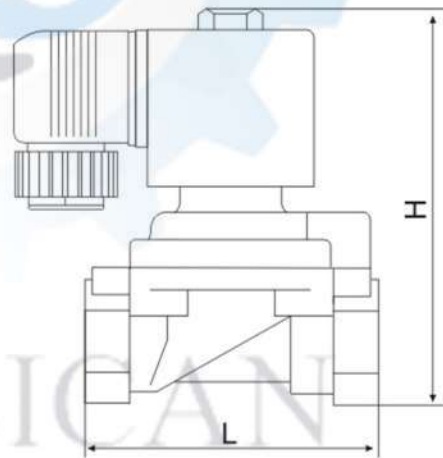

Product features

- Suitable medium: gas or fluid
- Medium temp.: -10°C– 80°C
- Action type: pilot operated type
- Working pressure: Normally closed : 1–70 bar
- Valve body material: Brass(Forged).
- Sealing material: Teflon
- Coil Protection level: Plastic coil IP65

Technology data

Model	Connecting Method	Diameter	Cv value	Length (mm)	Height (mm)	Medium temp.	Working pressure (pressure differential)	Rated voltage
XSG-10	G3/8"	15	4.8	78	120	-10~80°C	1~70 bar	220VAC/50HZ: 24VA DC24 DC12 18W Tolerance: ± 10% Other voltage can be customized
XSG-15	G1/2"	15	4.8	78	120			
XSG-20	G3/4"	20	7.6	80	125			
XSG-25	G1"	25	12	96	140			